


MODEL P710 SERIES MACHINES

Automatic Strapping Machines



Reliable packaging solutions for all industries.

- Auto strap load for operator convenience and safety
- Loop eject avoids strap jamming in the machine
- Heavy-duty casters for ease of mobility
- Auto feed retry corrects misfeeds and reduces downtime
- Electronic tension control for complete range of application
- Movable control module for ergonomic operation
- External coil mount for easy coil changeover
- Roller top work surface for easy package handling
- End of Strap eject for operator safety
- 110 volt, single phase, 60 Hz power for use in any facility

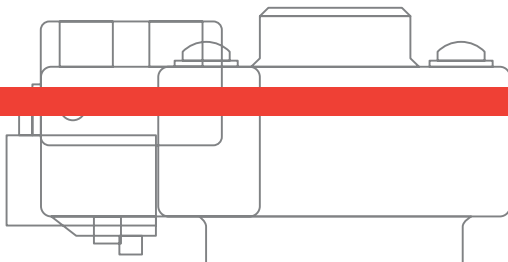

A few features of the Model P710

The P710 series machine offers all of the advantages of a high end automatic strapping machine designed for high output manufacturing facilities. Designed for long term reliability and all production rates, they have been proven throughout the world. High quality parts and components ensure that the machine will provide high productivity and low maintenance costs.

Available in a wide variety of configurations, the machine can be ordered as a bottom seal, side seal or narrow head unit to suit your production setup and package type. Stainless steel models are available for high moisture environments, and “low boy” configurations are ideal for conveyors as low as 17”.


Secondary Tension – Standard short range for conventional operation. Standard long range for additional time on compressible products.

Serpentine Track – 4” segments make up the P710 track allowing forgiveness in strap configuration while offering a significant reduction in wear of parts.

Trouble Alarm – A highly audible signal can be easily heard in the event of misfeeds or other problems, allowing the operator to abort the cycle and troubleshoot.

End of Strap Eject – The P710 detects the end of a strap coil and ejects a small piece that is in the accumulator to warn operator that the roll is low. The operator doesn't have to stick his hand in the machine to retrieve the end of the strap.

A few unique features of the P710 Series

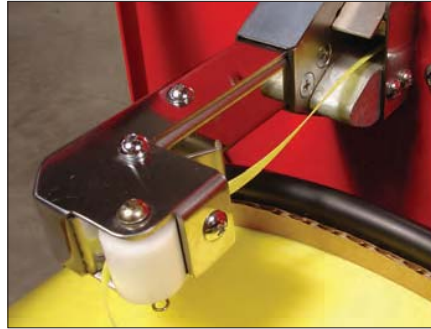

Automatic feed – **NEW** Operator simply inserts the end of the strap into the wheel to load – the machine then feeds the accumulator and track automatically.

Auto Refeed – If the strap doesn't go around the track and into the sealing head, the machine will pull the strap out and attempt to refeed it.



Loop Eject Feature – If the machine cycles accidentally without a package in the track, the strap is pulled tight around the sealing mechanism and then ejected, preventing time consuming strap jam.

